


ATEX certified, End-fed $1\!\!/_2$ λ dipole marine and base station antenna for the International Maritime VHF band in Hazardous areas

DESCRIPTION

- MA 160-Ex/... is a 0 dBd, vertically polarized, omnidirectional marine and base station antenna
 - Models within 154 162.025 MHz.
- \blacktriangleright Full-size, end-fed $1\!\!/_2$ $\lambda,$ black-chromed stainless steel whip.
- Before installing the antenna, read the ATEX Product Manual carefully.
- > The antenna is suitable for use in gas groups IIA, IIB and IIC in zone 2.
- The antenna can be mounted on threaded 1" water pipe using the supplied 1" revolving nut. In this way, a nice, slim installation is obtained.
- A wide variety of accessory mounting hardware (see below) gives ample choice regarding alternative ways of installation.
- All metal parts in the antenna are DC-grounded. Consequently, the antenna shows a DC-short across the coaxial cable.
- The antenna is a ½ λ design and this means that it needs neither loading coils, ground-plane, radials nor other auxiliary arrangements.

ORDERING

Туре	Product No.	Frequency
MA 160-Ex/157	115000035	154 - 160 MHz
MA 160-Ex/158.5	115000027	155.5 - 162.025 MHz
LW-SS-1"-Ex *	115000102	



SPECIFICATIONS


Electrical		
Polarisation	Vertical	
Pattern Type	Omnidirectional	
SWR	< 2.0:1	
Antistatic Protection	c Protection	

Mechanical	
Colour	Black
Mounting	On 1" RG (G1" - 11) threaded water pipe or on optional mounting brackets (see accessories)
ATEX Marking	II 3G Ex nA IIC T6

Environmental	
Ingress Protection	IP66



ACCESSORIES (TO BE ORDERED SEPARATELY)

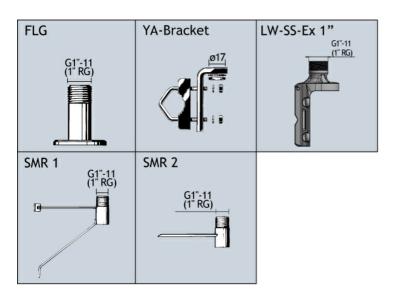

CALCULATION OF MAX. ANTENNA INPUT POWER IN DIFFERENT ATEX GROUPS

ATEX GROUP	MAX. EIRP POWER	ANTENNA GAIN	MAX INPUT POWER
IIA	37.7 dBm (6.0 W)	0 dBd / 2.15 dBi	35.6 dBm (3.6 W)
IIB	35.4 dBm (3.5 W)	0 dBd / 2.15 dBi	33.3 dBm (2.1 W)
IIC	33.0 dBm (2.0 W)	0 dBd / 2.15 dBi	30.8 dBm (1.2 W)

^{*}See the ATEX Product Manual (safety and mounting instructions) and related EU DECLARATION OF CONFORMITY ATEX Directive 2014/34/EU.



ATEX GROUNDING KIT

